




compact^{plus} TIME TO CARE

Infusomat[®] and Perfusor[®] compact^{plus} Time to Care





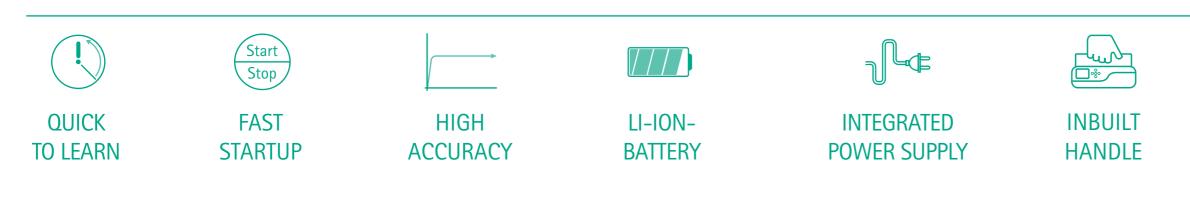



INTUITIVE HANDLING



B. BRAUN DOSEGUARD™




IP34 FLUID PROTECTION



Perfusor[®] compact^{plus} Release Time to Care



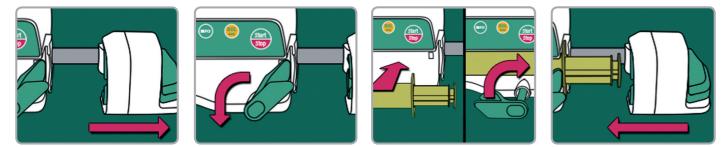





Flexibility Modular system for advanced and easy transport.






INTUITIVE HANDLING

Infusomat[®] compact^{plus} **Release Time to Care**



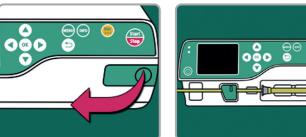



NUTRITION THERAPY

INFUSOMATPLUS

SAFESET

COLOUR DISPLAY



PrimeStop


A protective cap lined with a hydrophobic membrane stops fluid leaking and helps to protect against contamination.





INTUITIVE HANDLING

Advanced Workflow Saving Time to Care

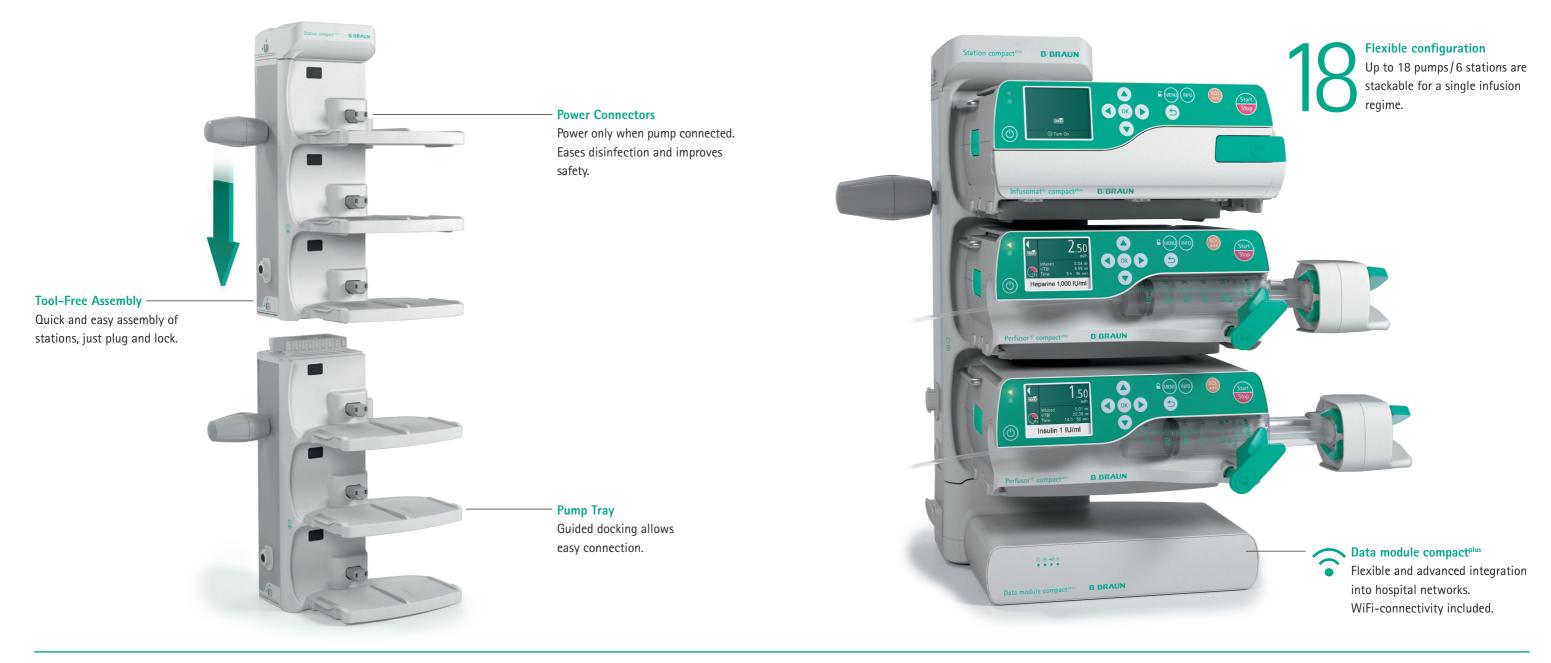











Dose Error Reduction System (DERS) Time to Care

B. Braun OnlineSuite For Innovative Solutions

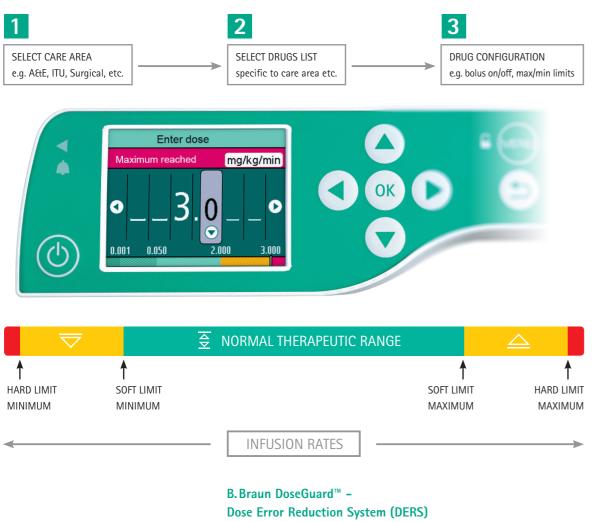

- more than 3,000 drugs
- specific care units
- 30 categories



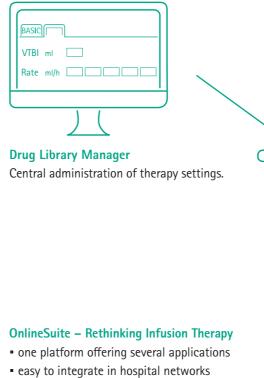

- drug library always up to date:
- update in seconds via network or WiFi
- update with USB



ಁೲ


] ၀၀ို၀


၂၀၀ို

Upload Manager device configuration.



B. BRAUN ONLINESUITE

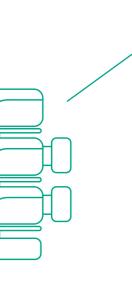



OneView

Increased efficiency due to centralized therapy data overview.



Centralized upload via the clinical network allows always up to date drug library and



Technical Data

Perfusor [®] compact ^{plus}	Description	
Туре	Infusion syringe pump	
Dimension	290x98x220 mm (WxHxD)	_
Weight	2.3 kg	
Moisture	IP34 (water splashing from any direction)	
Display	Colour active matrix 2.4" TFT, 240 x 320 pixels, 262k colours, viewing angle: all 80°	290 mm
Battery	Rechargeable Li-Ion battery Operating time: approx. 10h at 5 ml/h Recharging time: approx. 3h	
Basal Rates	0.01 - 999.9 ml/h	
Accuracy	± 2% in compliance with IEC/EN 60601-2-24	
Bolus Rates	Delivery rate 1 - 1,800 ml/h	
Supported Syringe Manufacturer	B.Braun Original Perfusor® Syringe, Omnifix®, BD, Terumo Sizes: 2/3, 5, 10, 20, 30, 50/60 ml	-
Drug Library	3,000 drugs including all parameters in up to 30 drug categories	-
Code no. (REF)	8717030	


Infusomat[®] compact^{plus} Description Volumetric infusion pump Туре 229x98x220 mm (WxHxD) Dimension Weight 1.9 kg IP34 (water splashing from any direction) Moisture Colour active matrix 2.4" TFT, 240 x 320 pixels, Display 262k colours, viewing angle: all 80° Rechargeable Li-lon battery Battery Operating time: approx. 6h at 25 ml/h Recharging time: approx. 3h **Basal Rates** 0.1-1,200 ml/h Accuracy ± 5% over 96 h **Bolus Rates** Delivery rate 1 - 1,200 ml/h Infusomat^{plus} Line Supported Infusion Line 3,000 drugs including all parameters in Drug Library up to 30 drug categories Code no. (REF) 8717050

CLEANING AND DISINFECTION

Group

Alcohols	Quaternary ammonium compounds	
Meliseptol [®] New Formula	Hexaquart [®] forte	
 Meliseptol[®] rapid 	 Hexaquart[®] plus 	
 Meliseptol[®] HBV Tissues 	Hexaquart [®] plus lemon fresh	
Meliseptol [®] Foam pure	■ Hexaquart [®] S	
 Meliseptol[®] Wipes sensitive 		
Softa® Cloth CHX 2%		
Aldehydes	Active chlorine	
Melsept [®] SF		
Melsitt [®]	Phenols	
	Peroxides	
Acid	Alkylamines	

The above listed groups of cleaners are approved under consideration of the normal disinfection procedure according to the manufacturers' reco	ommendatio
--	------------

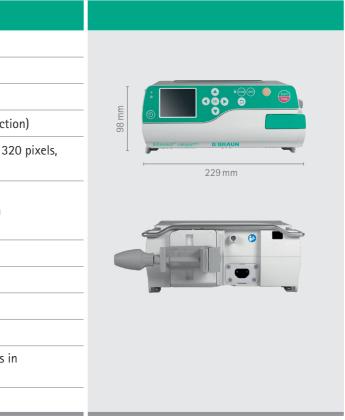

Technical Data

Station compact ^{plus}	Description	
Туре	Docking station for up to 3 infusion pumps	
Dimension	305x375x202 mm (WxHxD)	
Weight	3.3 kg	22 mm
Moisture	IP34 (water splashing from any direction)	31
Configuration	Tool-free assembly of up to 6 Station compact ^{plus}	
	(max. 18 infusion pumps) in one or two pillars.	305 mm
Interface Type	- Infrared	
	- Staff call	
Accessory	Fixation for wall railing systems and pole systems	
Pole Clamp	For vertical mounting with integrated over-twist protection	
Code no. (REF)	8717141	

Cover compact ^{plus}	Description	
Туре	Cover for Station compact ^{plus}	Station compact*** B DRAUN
Dimension	128x44x124 mm (WxHxD)	E Station compact ^{***} B BRAUN
Weight	0.25 kg	128 mm
Moisture	IP34 (water splashing from any direction)	
Code no. (REF)	8717145	

Data module compact ^{plus*}	Description		
Туре	Data module for Station compact ^{plus}		
Dimension	243x92x235 mm (WxHxD)	92 mm	
Weight	1.1 kg	243 mm	
Moisture	IP34 (water splashing from any direction)		
Interface Type	Data communication can be optionally integrated into a Station compact ^{plus} and allows data communication for up to 18 infusion pumps. Interfaces: Ethernet, 2 x USB, WiFi, HDMI, Mini DIN 9	(TTAN)	
Code no. (REF)	8717160		

* The Data module compact $^{\mbox{\tiny plus}}$ will be available in late 2018

Accessories

Product	Description	Code no. (REF)
Universal Station Clamp	Clamp for fixation to wall rails and IV poles	8717142
Connection lead 12V	Connection lead for on-board 12V supply	8718020
Staff call cable compact ^{plus}	Staff call cable for Pump compact ^{plus}	8718030
Staff call cable	Staff call cable for Station compact ^{plus}	8718031
Pillar connection cable 60 cm	Connection cable to connect two pillars 60 cm	8718060
Pillar connection cable 120 cm	Connection cable to connect two pillars 120 cm	8718061
Pillar connection cable 1,000 cm	Connection cable to connect two pillars 1,000 cm	8718062

We developed our process concept to optimize workflows and enhance transparency. We have identified five constitutive stages of infusion, and we suggest products and services that are aligned with each process step.

As they all come from a single source, they are optimized for one another. We are thus creating advanced system solutions at every step. Join us in raising the bar in infusion therapy.



PRESCRIPTION

PATIENT ACCESS

PREPARATION

APPLICATION

DISCHARGE MANAGEMENT

B. Braun Melsungen AG | www.bbraun.com